



淞平企業股份有限公司
SONG PIENG CO., LTD.

「SCHOOL」

STRENGTH:

- Antirust- Plastic lockers will never rust
- Dent & Scratch Resistant- Textured surface are resistant to scratches
- Odor Proof- Plastic lockers will not absorb gym odors
- Moisture corrosion & insect resistant



「FACTORY & CORPORATION」

Client/ Example:
Taiwan Semiconductor Manufacturing Company Ltd.

- Easy DIY style installation and replacement of damaged parts
- Available in multi-tiered (different size & colors) units
- Quick Ship: Quick Ship availability and shipped in knock down form



「OUTDOOR SPACE」

Better Design, Fashion Door

- Multiple colors selection for doors
- Available in multi-tiered (different size & colors) units
- Easy to Clean (ABS Material): Easy cleaning & low maintenance
- High Impact Resistant Door (642 Newton) & Heavy Duty Body (withstand up to 1900kgs force in per unit)

Table of Contents

1	About SPLocker	03
2	ABS Plastic Locker	04
2-1	ABS SP1 Series	04
2-2	ABS SP2 Series	06
2-3	ABS SP3 Series	08
2-4	ABS Mini Series	10
2-5	ABS Plus Series	12
3	Impact Resistant	13
3-1	ABS SP-1 Test & Inspection Report	13
3-2	ABS SP-2 Test & Inspection Report	14
4	ABS Plastic Assembly Locker	15
5	Better Design & Secure Lockers	16
6	Material Safety Data	20



About SPLocker

Soung Pieng Co., Ltd. (SP Locker) is the leading manufacturer & seller of the Lockers in Taiwan since 1978. SP Locker is also the first locker company that manufactures the ABS Plastic Lockers in Asia. We have the variety of the ABS products series and the exclusive assembling patents which you could easily assemble the lockers within few mins.



In recent years, due to the strong advantages of the ABS lockers (SP-1, SP2), our Lockers are common used in Taiwan, Japan, Korea, China, Singapore, Malaysia, Singapore, Thailand & Indonesia and also in many fields such as theme park, factories, hotel, health club, swimming pool, schools, etc.; our clients such as Tokyo Keizai University, University of Tsukuba, Tokyo Metropolitan Swimming pool, Japan MIZUNO health center, Taipei Zoo, Taiwan World Gym, Taiwan Semiconductor Manufacturing Company Ltd., Malaysia Ayamas Food Factory, Legoland Amusement Park, Singapore Shangri-La Hotel, Hilton Hotel, Micron Semiconductor, and so on.



SP Locker not only provides an innovative range of locker storage solutions to the clients ranging from small, medium sized business to large corporations, but also customizes the lockers from special needs via our experienced staff. For any query, please contact our international department.



WebSite: <http://www.splockers.com.tw/en/>



Address: 1F., No.5, Lane 166, Chongyang Rd., Nangang District, Taipei City 115, Taiwan

TEL: +886-2-2782-1992 FAX: +886-2-2654-6283
E-mail: oversea@splockers.com

ABS SP-1 Plastic Locker



Advantages :

- Impact Resistant
- Easy Assembly
- Pleasant Design
- Odor Proof
- Material Safety Data

Features :

- > They are made of 100% ABS Plastic (Acrylonitrile, Butadiene & Styrene), also known as Engineer grade Plastic.
- > High Impact Resistant Door (**638 Newton**) & Heavy Duty Body (withstand up to **1900kgs** force in per unit)
- > Dent & Scratch Resistant: Textured surface are resistant to scratches. Material resists dents
- > Antirust: Plastic lockers will never rust
- > Moisture corrosion & insect resistant
- > Easy to Clean: Easy cleaning & low maintenance
- > Odor Proof: Plastic lockers will not absorb gym odors
- > Our boltless design- absolutely no tools required- allow easy DIY style installation and replacement of damaged parts.
- > Quick Ship: Quick Ship availability and shipped in knock down form, assembly is swift and easy
- > Shelf: Solid Plastic Adjustable shelving to form additional storage space
- > Available in multi-tiered units: Different sizes and colors of locker unit can be mixed and matched
- > Multiple colors selection for doors.
- > Multi Lock System: Key , Keyless , Coin , Coin Return, Pad Lock, Without/ Handle Lock
- > Warranty: 3 years warranty on manufacture defects
- > Wide ideal application: theme parks, hypermarkets, shopping malls, swimming pools, hot spring, GYM, schools, factories, other public access areas & others
- > Base: 50mm Tall Base

S

External Dimension :
W31 x H35 x D46 cm
Internal Dimension :
W27 x H32.5 x D44 cm

M

External Dimension :
W31 x H43.5 x D46 cm
Internal Dimension :
W27 x H41 x D44 cm


MM

External Dimension :
W31 x H21.7 x D46 cm
Internal Dimension :
W27 x H19 x D44 cm



L

External Dimension :
W31 x H58 x D46 cm
Internal Dimension :
W27 x H55.5 x D44 cm

• Standard Colors :



• Optional Colors :

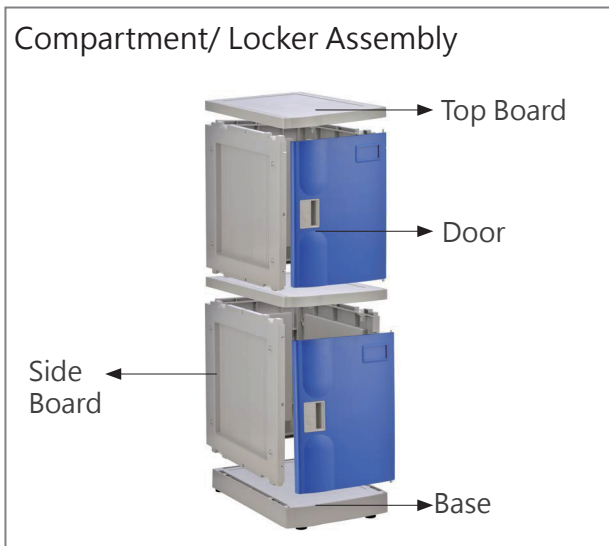

10cm Base



5cm Base

Adjusting Screw
(for base)

Top Board

First Shelf
InstallmentSecond Shelf
InstallmentKeyless Lock
N9-4S-2Keyless Lock
N9-4S-3Keyless Lock
N8-3APad Lock
P1-YKey Lock
K1-WKey Lock
K2-WCoin Return
Proprietary
Lock R1-SHandle
H1-S

ABS SP-2 Plastic Locker



Advantages :

- Impact Resistant
- Easy Assembly
- Pleasant Design
- Odor Proof
- Material Safety Data

Features :

- > Better Design, Better Outward
- > They are made of 100% ABS Plastic (Acrylonitrile, Butadiene & Styrene), also known as Engineer grade Plastic.
- > High Impact Resistant Door (**642 Newton**) & Heavy Duty Body (withstand up to **1507kgf** force in per unit)
- > Comparing with SP1, the price of SP2 is more economical
- > Dent & Scratch Resistant: Textured surface are resistant to scratches. Material resists dents
- > Antirust: Plastic lockers will never rust
- > Moisture corrosion & insect resistant
- > Easy to Clean: Easy cleaning & low maintenance
- > Odor Proof: Plastic lockers will not absorb gym odors
- > Our boltless design- absolutely no tools required- allow easy DIY style installation and replacement of damaged parts.
- > Quick Ship: Quick Ship availability and shipped in knock down form, assembly is swift and easy
- > Shelf: Solid Plastic Adjustable shelving to form additional storage space
- > Available in multi-tiered units: Different sizes and colors of locker unit can be mixed and matched
- > Multiple colors selection for doors.
- > Lock Options: Key , Keyless , Coin , Coin Return, Pad Lock, Without/ Handle Lock
- > Warranty: 3 years warranty on manufacture defects
- > Suitable for theme parks, hypermarkets, shopping malls, swimming pools, hot spring, GYM, schools, factories, other public access areas & others
- > Base: 100mm Tall Base

S

External Dimension :
W31 x H35 x D46 cm
Internal Dimension :
W27 x H32.5 x D44 cm

M

External Dimension :
W31 x H43.5 x D46 cm
Internal Dimension :
W27 x H41 x D44 cm


L

External Dimension :
W31 x H58 x D46 cm
Internal Dimension :
W27 x H55.5 x D44 cm


XL

External Dimension :
W31 x H87.5 x D46 cm
Internal Dimension :
W27 x H85.5 x D44 cm


• Standard Colors :



• Optional Colors :



Compartment/ Locker Assembly

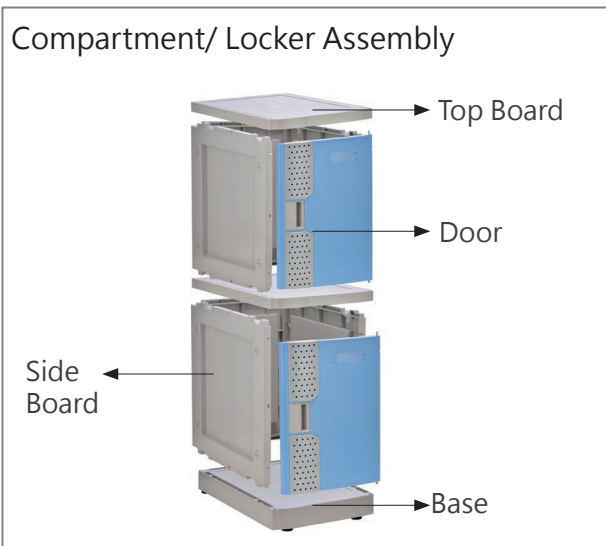

10cm Base



5cm Base

Adjusting Screw
(for base)Ventilation
CoverXL Door Set
Pen Slot

XL Door Hook



Top Board

First Shelf
InstallmentSecond Shelf
InstallmentKeyless Lock
N9-4S-2Keyless Lock
N9-4S-3Keyless Lock
N8-3APad Lock
P1-YKey Lock
K1-WKey Lock
K2-WCoin Return
Proprietary
Lock R1-SHandle
H1-S

ABS SP3 Plastic Lockers

Features

- 100% ABS Plastic (Acrylonitrile, Butadiene & Styrene), also known as Engineer Grade Plastic
- Our boltless design- absolutely no tools required
- Dent, Scratch, insect Resistant, Antirust & Moisture corrosion
- Lock Options: Key, Combination, RFID, Pad Locks, & Handle.
- Door has the spring devises which provide the door with automatically closing function.
- Available in multi-tiered units: Different sizes and colors of locker unit can be mixed and matched
- Made in Taiwan; 3 years warranty on manufacture defect



External Dimension: W31 x H35 x D46 cm
Internal Dimension: W26.7 x H32.2 x D44 cm



External Dimension: W31 x H43.5 x D46 cm
Internal Dimension: W26.7 x H40.7 x D44 cm




External Dimension: W31 x H58 x D46 cm
Internal Dimension: W26.7 x H55.2 x D44 cm



The Slit of MailBox
Dimension: W22.3 x D1.5cm

- Door Colors
 - Olive Green
 - Midnight Blue
 - Sunlight Orange
 - Khaki
 - Camellia Red
 - Space Grey
 - Wisteria Purple

- Mail Locker Door Colors
 - Khaki
 - Brown
 - White

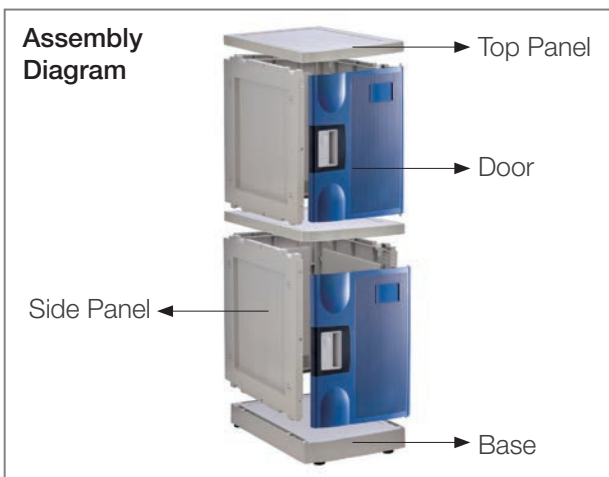

SP3 Door Handle Frame



Low Base 5CM



One Piece Shelf Installation



Separated Handle Frame



High Base 10CM



Two Pieces Shelves Installation

Advantages

- High Impact Resistant Door & Heavy Duty Body
- Easy Assembly/ Disassembly
- Sturdy & Durable
- Odor Proof



Combination Lock N9-4S-2

Combination Lock N9-4S-3

Combination Lock N8-3A

Combination Lock N6-3S



Key lock K1-W



Key lock K2-W



Coin Return Lock R1-S



Padlock P1-Y



Padlock P2-W




Handle H1-S



Handle H1-S (Black)




RFID EL-1



Electronic Numeric Lock EL-001

Actual Pictures

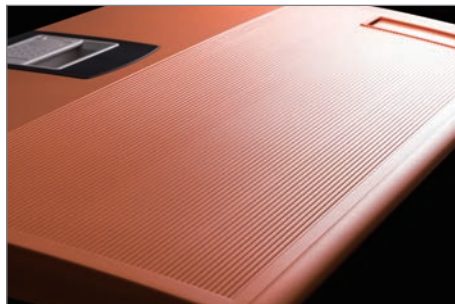

淞平企業股份有限公司
SOUNG PIENG COMPANY LIMITED

WebSite: <http://www.splockers.com.tw>



1F., No.5, Lane 166, Chongyang Rd., Nangang District,
Taipei City 115, Taiwan
TEL: +886-2-2782-1992 FAX: +886-2-2654-6283
E-mail: oversea@splockers.com

ABS Mini Plastic Lockers



Features

- 100% ABS Plastic (Acrylonitrile, Butadiene & Styrene), also known as Engineer Grade Plastic
- Our boltless design- absolutely no tools required
- Dent, Scratch, insect Resistant, Antirust & Moisture corrosion
- Lock Options: Key, Combination, RFID, Pad Locks, & Handle.
- Available in multi-tiered units: Different sizes and colors of locker unit can be mixed and matched
- Made in Taiwan; 3 years warranty on manufacture defect

Storage \ Shoes \ Cell Phone \ Accessary Lockers

3S



External Dimension: W28.5×H17.5×D35 cm
Internal Dimension: W24.5×H15.7×D32.5 cm


2S



External Dimension: W28.5×H29 ×D35 cm
Internal Dimension: W24.5×H27.2×D32.5 cm

- Standard Colors Lake Green Navi Blue Bright Orange Rice White Brown
- Special Colors Transparent Fog Wood Grain

Assembly Diagram

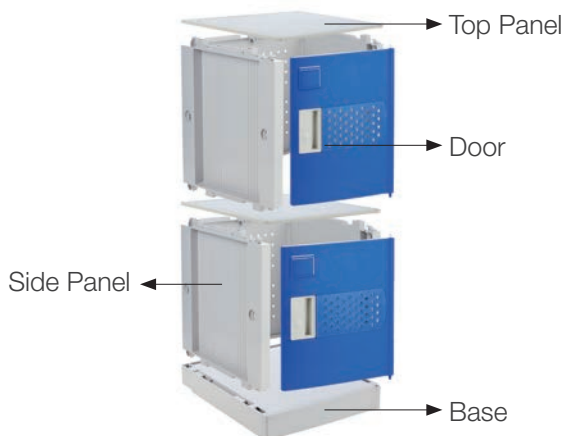

Base 5CM



Top Panel




Height Adjuster



One Piece Shelf Installation



Vented Door



Vented Back Panel



Combination Lock N9-4S-2



Combination Lock N9-4S-3



Combination Lock N8-3A



Padlock P1-Y



Key lock K1-W



Key lock K2-W



RFID EL-1



Handle H1-S

Advantages

- Affordable Price
- Easy Assembly/ Disassembly
- Sturdy & Durable
- Odor Proof

Actual Pictures



淞平企業股份有限公司
SONG PIENG ENTERPRISE CO., LTD.

WebSite: <http://www.splockers.com.tw>



1F, No.5, Lane 166, Chongyang Rd., Nangang District,
Taipei City 115, Taiwan
TEL: +886-2-2782-1992 FAX: +886-2-2654-6283
E-mail: oversea@splockers.com

ABS PLUS ABS Locker

Features

- 100% ABS Plastic (Acrylonitrile, Butadiene & Styrene), also known as Engineer Grade Plastic Our boltless design- absolutely no tools required
- Lock Options: Key , Combination , RFID , Pad Locks & Handle
- New Trendy Grid Door Design with anti-scratch dual painting.
- Available in multi-tiered units: Different sizes and colors of locker unit can be mixed and matched
- High Impact Resistant Door (642 Newton) & Heavy Duty Body (withstand up to 1507kgf force in per unit)

Made In Taiwan; 3 years warranty on manufacture defects

3S+



External Dimension: W32 x H22.2 x D38.8 cm
Internal Dimension: W28 x H19.3 x D35.6 cm



2S+



External Dimension: W32 x H33.3 x D38.8 cm
Internal Dimension: W28 x H30.4 x D35.6 cm

- Door Colors  Olive Green  Wisteria Purple  Dark Grey

Assembly Diagram

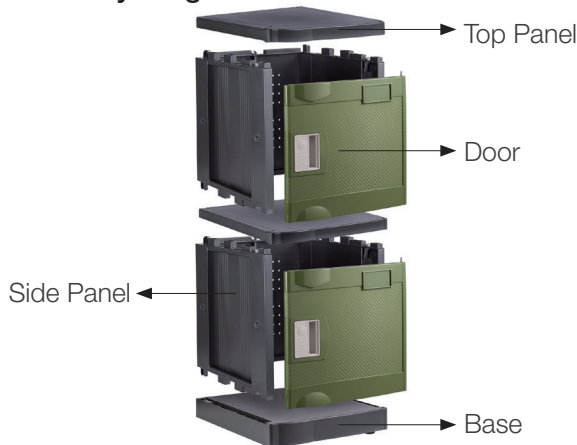

New Trendy Grid Door Design



Hidden Buckles



Internal Flattening Design



Base



Top Panel



Dark Grey Body

Advantages

- High Impact Resistant Door & Heavy Duty Body
- Easy Assembly/ Disassembly
- Sturdy & Durable
- Odor Proof



Combination Lock N9-4S-2



Combination Lock N9-4S-3



Combination Lock N8-3A



Combination Lock N6-3S




Key lock K1-W



Key lock K2-W



Coin Return Lock R1-S




Padlock P1-Y



Padlock P2-W




Handle H1-S



Handle H1-S (Black)



RFID EL-1



Electronic Numeric Lock EL-001

ABS SP-1 Test & Inspection Report

KING DESIGN®
 KING DESIGN INDUSTRIAL CO., LTD.
 4F, NO. 3, Lane 270, Pei Shen Road Sec. 3,
 Shen Keng Dist., New Taipei City, 222, Taiwan, R.O.C
 TEL: 886-2-2662-5100 FAX: 886-2-2662-3094

Reliability & Communication Testing Instruments
VIBRATION TEST LABORATORY
<http://www.kdi.tw>
<http://www.vibration.com.tw>
 E-mail: service@kdi.tw

TESTING / INSPECTION REPORT

TEST ENVIRONMENT :

1. Impulse Hammer : DACTRON 5850B S/N : 1867
2. Measure system : DACTRON PHOTO RT-PRO PHO-100
 S/N : 4750143

TEST ENVIRONMENT :

- Temperature : 22.3°C (25±10°C)
 Relative Humidity : 66%RH (50±25% RH)

SPECIMEN :

- Model : APL
 Quantity : 1 piece

TEST RESULT :

Direction	Impact Force (Newton)	Test Result
Top side	807.948	The first percussion 363 Newton, increase the percussion power 636 Newton, until the third hit the top side of the biggest break when force is 807.948 Newton
Left side	559.471	The first percussion 360 Newton, increase the percussion power 463 Newton, the biggest hit until the third when the right side of the rupture force as 559.471 Newton
Front side	643.474	The first percussion 305 Newton, increase the percussion power 534 Newton, the biggest hit until the third when the left side of the power breakdown for the 643.474 Newton

KING DESIGN®
 KING DESIGN INDUSTRIAL CO., LTD.
 4F, NO. 3, Lane 270, Pei Shen Road Sec. 3,
 Shen Keng Dist., New Taipei City, 222, Taiwan, R.O.C
 TEL: 886-2-2662-5100 FAX: 886-2-2662-3094

Reliability & Communication Testing Instruments
VIBRATION LABORATORY
<http://www.kdi.tw>
<http://www.vibration.com.tw>
 E-mail: service@kdi.tw

TESTING / INSPECTION REPORT

TESTING EQUIPMENT :

- Compression Test : KING DESIGN HT-902T-L S/N : KDC12155811

TEST ENVIRONMENT :

- Temperature : 24.5°C (25±10°C)
 Relative Humidity : 60%RH (60±20% RH)

SPECIMEN :

- Model : APL
 Quantity : 1 piece

COMPRESSION TEST SPECIFICATIO

- Compression Rate : 12.7 mm/min

TEST RESULT :

- Measurement result as below :
 Compression Strength (kgf) : 1954.9

Describe	PASS	FAIL	Non-Judgment
Function judgment	√	---	---
Appearance check	√	---	---

The test product to accept 1954.9 kgf, no evidence of major visual defects and broken on the surface.

ABS SP-2 Test & Inspection Report

KING DESIGN
KING DESIGN INDUSTRIAL CO., LTD.
4F, NO 3, Lane 270, Pei Shen Road Sec.3,
Shen Keng Hsiang, Taipei Hsien 222, Taiwan, R.O.C
TEL: 886-2-2662-5100 FAX: 886-2-2662-3094

Reliability & Communication Testing Instruments
VIBRATION LABORATORY
http://www.king-design.com.tw
E-mail: lab@king-design.com.tw

TESTING / INSPECTION REPORT

TEST ENVIRONMENT :
1. Impulse Hammer : DACTRON 5850B S/N1867
2. Measure system : DACTRON PHOTO RT-PRO PHO-100
S/N : 4750143

TEST ENVIRONMENT :
Temperature : 23±2°C
Relative Humidity : 70±20% RH

SPECIMEN :
Model : APL
Quantity : 1 piece

TEST RESULT :

Direction	Impact Force (Newton)	Test Result
Top side	217.217	The first percussioin 160Newton, increase the percussioin power 200Newton, until the third hit the middle of the biggest break when force is 217.217Newton
Right side	203.585	The first percussioin 150Newton, increase the percussioin power 180Newton, the biggest hit until the third when the right of the rupture force as 203.585Newton
Left side	229.547	The first percussioin 155Newton, increase the percussioin power 202Newton, the biggest hit until the third when the left side of the power breakdown for the 229.547Newton

KING DESIGN
KING DESIGN INDUSTRIAL CO., LTD.
4F, NO 3, Lane 270, Pei Shen Road Sec.3,
Shen Keng Hsiang, Taipei Hsien 222, Taiwan, R.O.C
TEL: 886-2-2662-5100 FAX: 886-2-2662-3094

Reliability & Communication Testing Instruments
VIBRATION LABORATORY
http://www.king-design.com.tw
E-mail: lab@king-design.com.tw

TESTING / INSPECTION REPORT

TEST ENVIRONMENT :
1. Impulse Hammer : DACTRON 5850B S/N1867
S/N : 4750143
2. Measure system : DACTRON PHOTO RT-PRO PHO-100

TEST ENVIRONMENT :
Temperature : 23±2°C
Relative Humidity : 70±20% RH

SPECIMEN :
Model : APL
Quantity : 1 piece

TEST RESULT :

Direction	Impact Force (Newton)	Test Result
Front side	642.321	Only ventilation cover was shaken off but no cracks on either door nor ventilation cover

KING DESIGN
KING DESIGN INDUSTRIAL CO., LTD.
4F, NO 3, Lane 270, Pei Shen Road Sec.3,
Shen Keng Hsiang, Taipei Hsien 222, Taiwan, R.O.C
TEL: 886-2-2662-5100 FAX: 886-2-2662-3094

Reliability & Communication Testing Instruments
VIBRATION LABORATORY
http://www.king-design.com.tw
E-mail: lab@king-design.com.tw

TESTING / INSPECTION REPORT

TESTING EQUIPMENT :
Compression Test : KING DESIGN HT-902T-L S/N : KDC12155811

TEST ENVIRONMENT :
Temperature : 25.5°C (25±10°C)
Relative Humidity : 62.7%RH (60±20% RH)

SPECIMEN :
Model : APL
Quantity : 1 piece

COMPRESSION TEST SPECIFICATIO
Compression Rate : 12.7 mm/min

TEST RESULT :
Measurement result as below :
Compression Strength (kgf) : 1507.4

Describe	PASS	FAIL	Non-Judgment
Function judgment	√	---	---
Appearance check	√	---	---

The test product to accept 1507.4 kgf, no evidence of major visual defects and broken on the surface.

KING DESIGN
KING DESIGN INDUSTRIAL CO., LTD.
4F, NO 3, Lane 270, Pei Shen Road Sec.3,
Shen Keng Hsiang, Taipei Hsien 222, Taiwan, R.O.C
TEL: 886-2-2662-5100 FAX: 886-2-2662-3094

Reliability & Communication Testing Instruments
VIBRATION LABORATORY
http://www.king-design.com.tw
E-mail: lab@king-design.com.tw

TESTING / INSPECTION REPORT

Testing photos

KING DESIGN
KING DESIGN INDUSTRIAL CO., LTD.
4F, NO 3, Lane 270, Pei Shen Road Sec.3,
Shen Keng Hsiang, Taipei Hsien 222, Taiwan, R.O.C
TEL: 886-2-2662-5100 FAX: 886-2-2662-3094

Reliability & Communication Testing Instruments
VIBRATION LABORATORY
http://www.king-design.com.tw
E-mail: lab@king-design.com.tw

TESTING / INSPECTION REPORT

Testing photos

KING DESIGN
KING DESIGN INDUSTRIAL CO., LTD.
4F, NO 3, Lane 270, Pei Shen Road Sec.3,
Shen Keng Hsiang, Taipei Hsien 222, Taiwan, R.O.C
TEL: 886-2-2662-5100 FAX: 886-2-2662-3094

Reliability & Communication Testing Instruments
VIBRATION LABORATORY
http://www.king-design.com.tw
E-mail: lab@king-design.com.tw

TESTING / INSPECTION REPORT

Testing photos

KING DESIGN
KING DESIGN INDUSTRIAL CO., LTD.
4F, NO 3, Lane 270, Pei Shen Road Sec.3,
Shen Keng Hsiang, Taipei Hsien 222, Taiwan, R.O.C
TEL: 886-2-2662-5100 FAX: 886-2-2662-3094

Reliability & Communication Testing Instruments
VIBRATION LABORATORY
http://www.king-design.com.tw
E-mail: lab@king-design.com.tw

TESTING / INSPECTION REPORT

Testing photos

ABS Plastic Assembly Locker






How to assemble and disassemble a plastic locker.



DIY Assembly



boltless design; no tool required

First, get ready the parts of locker needed.

			
Base Board with adj. nut x 1 piece	Side Board x 2 pieces	Back Board x 1 piece	Top Board x 1 piece

01 	02 	03 
Step 1: Insert the back panel tabs into the pockets along the rear edge of the side panel.	Step 2: Press another side panel onto the tabs on the other side of the back panel.	Step 3: Join and press down the sides-back-and-top-panel assembled into the base panel.

04 	05 	06 
Step 4: Push 4 latches inwards to lock.	Step 5: Press down top panel onto the top of the assembly.	Step 6: Push 4 latches inwards to lock.

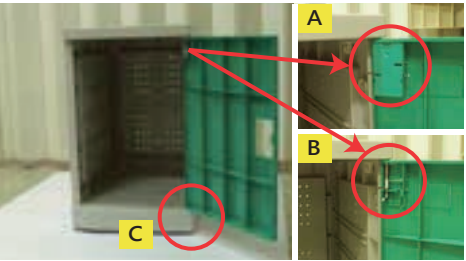
07 	
Step 7: Inset Locker Door into mounting at Base Board, C. Then press down door hinge cap, A and push down Metal hook spring and insert into mounting at Top Board.	Locker installation is completed. Repeat step 1 to step 7 for upper compartment if required.

Better Design & Secure Lockers


Japan




梅光 Institute

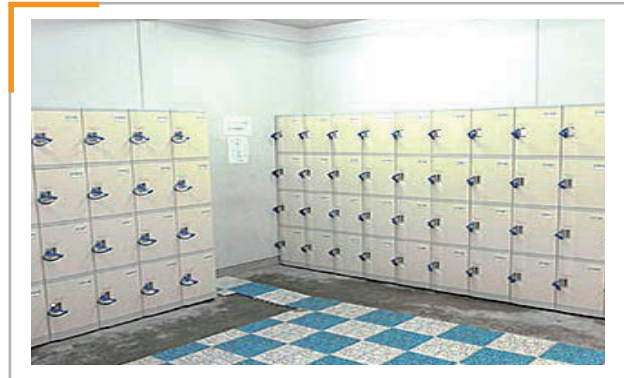

海洋体育 Marie Stadium Dressing Room

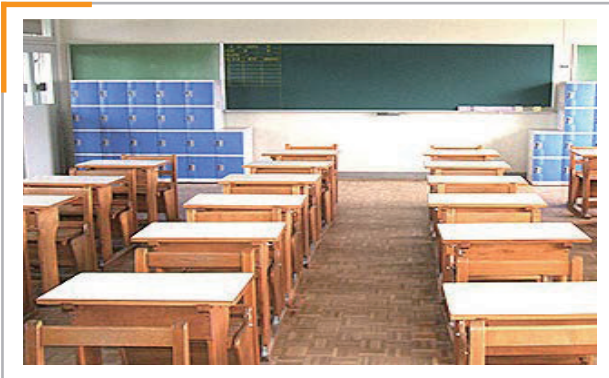

愛光学園生徒ロッカー

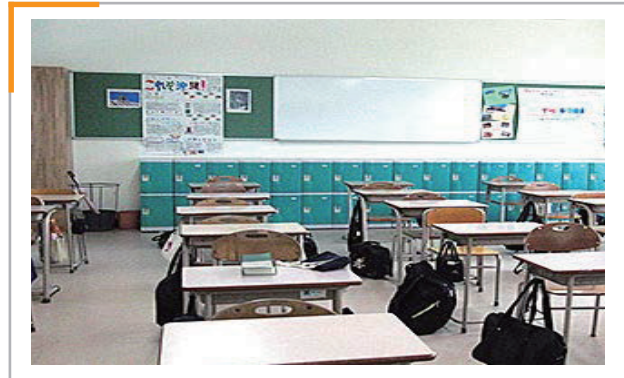

ルーテル Institute




キッズ男子



F ユニチカ Female Dressing Room



初芝富田林設置写真

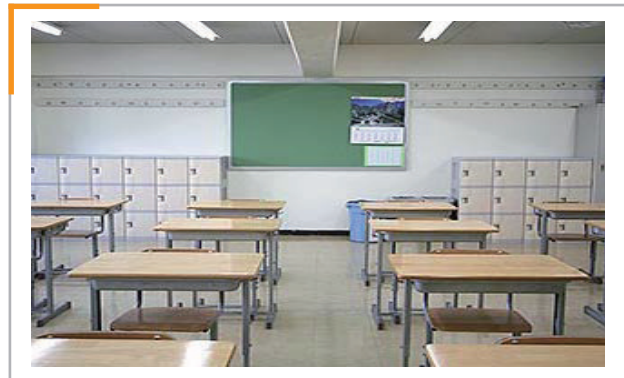

近畿情報 School ニチネン

Better Design & Secure Lockers



大成高等学校




日銀大阪支店設置写真



田辺 Park プール Swimming Pool


Taiwan

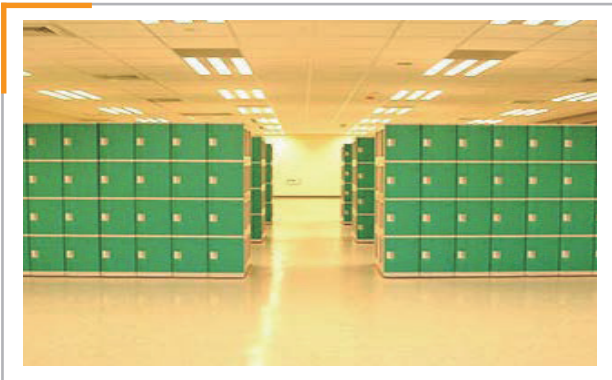

TSMC



Taipei Zoo

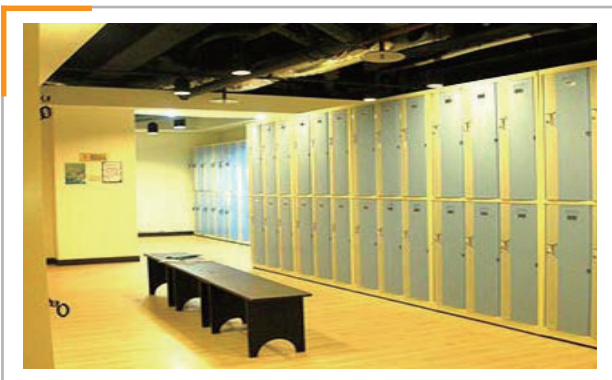

Beckham Fitness



Far Eastern Memorial Hospital

Better Design & Secure Lockers



China Theme Park



JYQ SPA




Kawayu Hot Spring



National Central University



Swimina Swimming Pool

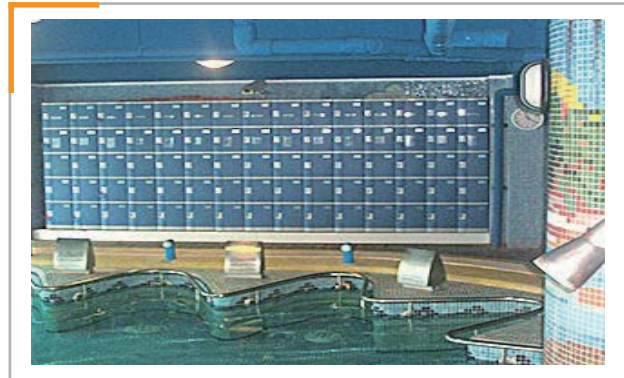

Pacific Green Bay Resort Center



TaiAn Hospital



Taipei Power Plant

Better Design & Secure Lockers



Taipei University



TAISUCO Shopping Mall



Tehchang Leather Factory



Wanhua Sport Center

Odor Proof



Material Safety Data

CHIMEI

奇美實業股份有限公司
CHI MEI CORPORATION

No. 59-1, SAN CHIA, JEN TE DISTRICT, TAINAN CITY, TAIWAN
TEL: +886-6-266-5000 FAX: +886-6-266-5555-7

High Impact PS POLYREX® Characteristics PH-88

特性 PROPERTIES	測試方法 ASTM TEST METHOD	測試條件 TEST CONDITION	單位 UNIT	耐衝擊級	
				PH-88	HIGH IMPACT
熔融指數 Melt Flow Index	D1238	200 °C, 5 Kg	g/10 min	6.0	
比重 Mass Density	D792	23 °C	-	1.05	
硬度 Hardness	D785	-	L Scale	60	
拉伸強度 (斷裂) Tensile Strength (Break)	D638	6 mm/min	Kg/cm ² lb/in ²	240 3410	
延伸率 Tensile Elongation	D638	6 mm/min	%	40	
彎曲強度 Flexural Strength	D790	2.8 mm/min	Kg/cm ² lb/in ²	380 5400	
彎曲彈性模數 Flexural Modulus	D790	2.8 mm/min	10 ³ Kg/cm ² 10 ³ lb/in ²	2.0 2.8	
IZOD 衝擊強度 Izod Impact Strength	D256 (Notched)	6.4 mm, 23°C	Kg-cm/cm ft-lb/in	8.5 1.56	
		3.2 mm, 23°C	Kg-cm/cm ft-lb/in	10.0 1.84	
維氏軟化溫度 Vicat Softening Temp.	D1525	1 Kg, 50 °C/hr	°C °F	98 208	
熱變形溫度 Heat Distortion Temp.	D648	Annealed	°C °F	94 201	
		Unannealed	°C °F	80 176	
UL 燃燒等級 UL Flammability	UL 94	-	-	1.5 mm HB	

Notes : These are typical properties only and are not to be construed as specifications. Users should confirm results by their own tests.

The above statement is based on our current level of knowledge and covers the above products directly manufactured and supplied by CHI MEI CORPORATION as of the date of issue. CHI MEI CORPORATION makes no warranties, whether express or implied, and assumes no liability in connection with any use of above information. Notwithstanding the foregoing, CHI MEI CORPORATION shall in no event be held obligated or liable for any claims due to or arising from (i) any customer provided, conceived, materials and/or parts, which are incorporated or adopted in the products; (ii) any combination of the products with material not provided or authorized by our company; (iii) any modifications to the products which are made or directed by customer; (iv) our compliance with the specifications, instructions, and/or designs provided by customer; (v) any anti-trust, unfair competition and/or other unlawful actions effected by customer; or (vi) any defects, infringement, breach and/or violation which are arising out of customer's faults or otherwise not solely and directly attributable to CHI MEI CORPORATION. In no event will CHI MEI CORPORATION be liable for any indirect, special, exemplary, punitive, or consequential damages (including lost profits) of any nature whatsoever whether arising out of the purchase, shipment, unloading, handling, or use of any product or otherwise.

TÜVRheinland®

Produkte
Products

Prüfbericht - Nr.: 10044908 105	Seite 1 von 2 Test Report No.: Page 1 of 2
Auftraggeber: Client:	Chi Mei Corporation 59-1, San Chia, Jen Te, Tainan City 71702, Taiwan, R.O.C.
Gegenstand der Prüfung: Test Item:	STYRENE-BUTADIENE COPOLYMER
Bezeichnung: Identification:	POLYREX® PH-888H / Nature
Anlieferungszustand: Delivery condition:	apparent good
Eingangsdatum: Date of Receipt:	2013-12-16
Prüfort: Testing location:	TÜV Rheinland Hong Kong Ltd.
Prüfungsbasis: Test specification:	According to RoHS (recast) Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment, 2011/65/EU; Total Content of Lead, Cadmium, Mercury, Chromium VI, Polybrominated Biphenyls, Polybrominated Diphenyl Ethers
Prüfresultat: Test result:	According to the kind and extend of tests performed the above mentioned test item passed the test specification.
geprüft: tested by:	kontrolliert: checked by:
2014-01-02 Anne Chen Date Name/Position	2014-01-02 Carl Chang Date Name/Position
Sonstiges/ Other Aspects: Test period: 2013-12-16 – 2014-01-02	
Abkürzungen: <i>ok/IF</i> = entspricht Prüfungsziel / <i>not ok/IF</i> = entspricht nicht Prüfungsziel / <i>not ok/IF</i> = nicht anwendbar Abkürzungen: <i>ok/IF</i> = passed / <i>not ok/IF</i> = failed / <i>not ok/IF</i> = not applicable	
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.	
TÜV Rheinland Taiwan Ltd. Softlines 4F, No.758, Sec. 4, Binyu Rd., Scorpion Dist, Taipei 105, Taiwan, R.O.C. Tel: +886 2 2172-7000 Fax: +886 2 2528-0018 Mail: service@tuv.com Web: www.tuv.com	

TÜVRheinland®

Produkte
Products

Test Report No. : 10044908 105 2014-01-02
Customer : Chi Mei Corporation
Test Method : Cd, Pb, Hg, Cr VI, PBB/PBDE – determination with reference to EN 62321-2009

Sample	LoD	POLYREX® PH-888H / Nature plastic / white	TCL131216-110
Cadmium (Cd)	mg/kg	2	n.d.
Lead (Pb)	mg/kg	2	n.d.
Mercury (Hg)	mg/kg	2	n.d.
Chromium VI (Cr VI)	mg/kg	2	n.d.
PBBs	mg/kg	10	n.d.
PBDEs	mg/kg	10	n.d.

Notes:
- n.d. - not detected
- n.s. - not applicable
- LoD - Limit of Detection
- mg/kg is equal to ppm (parts per million)

	Cd	Cr(VI)	Pb	Hg	PBBs	PBDEs
Maximum permissible Limit acc. to 2011/65/EU (mg/kg)	100	1000	1000	1000	1000	1000

Test Sample



— End of Test-Report —

Certificate of Registration



The Governing Board of
Q.A. International Certification Limited
hereby grants to:

Liang Cherng Plastic Ltd.
Registration No. : QAIC / TW / 090190 - A

(hereinafter called the Registered Company) the right to be listed in the Directory of Registered Companies in respect of the services listed below. These services shall be offered by the Registered Company at or from only the address given below in accordance with the quality management system in compliance with ISO 9001:2008.

Address to which this Certificate refers :

No.7, Nung 5, Shiang 44, Sec. 1, Shin-Ren Rd., Tay-Ping Dist., Taichung City, Taiwan, R.O.C.

Approved Scope to which this Certificate refers.

The Design and Manufacture of Plastic Injection Products.
(Further clarification regarding the Scope of this Certificate and the applicability of ISO 9001:2008 requirements may be obtained by consulting the organisation)

Signed for and on behalf of the Board

[Signature]
CHIEF EXECUTIVE

[Signature]
SCHEME MANAGER

Certificate Issue Date : 13th October 2014 - Certificate Expiry Date : 27th October 2015
Date of Initial Registration : 30th November 2009 - Re-assessment Date : 27th October 2015

This Certificate of Registration is granted subject to the Regulations approved by the Board.

QA INTERNATIONAL
Q.A. International Certification Ltd.
Dunster Court
Dunster Road
Durlington
United Kingdom
DL1 3GG

